WALL

stainless STEEL | aluminum | I.T.

Supply	115 V - 60 Hz
Watts	18,4
Inlet water pipe	ø 3/8”
Typology	Wall mounting
NET WEIGHT lb	15.4
GROSS WEIGHT lb	17.6
Dimensions L x W x H (in)	10.7 x 4.5 x 35.4
Packaging dimensions (in)	12.6 x 6.7 x 37.7
Dispensing area height (in)	11.2
Materials	Robust Stainless steel frame
	Anodized aluminum front panel
	High quality professional valve
Dispensing	Cold and sparkling water

OPTIONAL

FILTER	UV OUT (in)side)
WALL BRACKET	√

For a proper installation of the system, the use of the Water Block is compulsory.

Available with 1 or 2 buttons

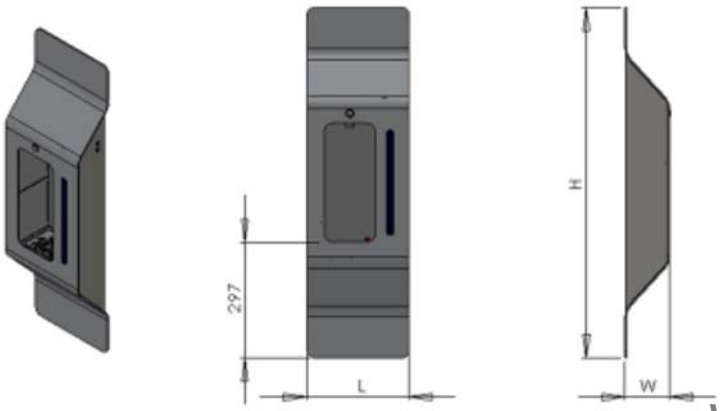

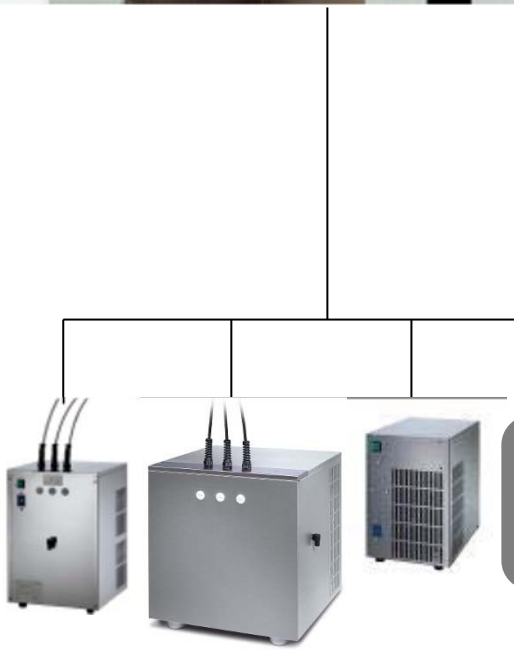

Easily connected to any type of under-counter refrigerator that has already been installed

WALL can be connected to the cooling unit that has been placed at distance.

blupura

Associations: we | GWCA | BWCA | Water Quality | edwca | AQUA ITALIA | confida | bdv | AIAQ

Blupura Srl - Italy | T. +39 071 971 0080
info@blupura.com |www.blupura.com

Blupura USA Inc. - USA | T. +1 305 777 3591
blupurausa@blupura.com

Certifications: WRAS | Intertek | CE | ETL | Intertek