




COOL1



	COOL1 FIZZ 150	COOL1 FIZZ 80
Cooling capacity (lt/h)	150	80
Continuous supply (lt)	80	45
Cold water Temperature*	5° - 12° C	
Ice bank capacity (lt)	18	14
Ice bank (Kg)	8	5
Cooling technology	ICE BANK - Double Stainless Steel coil	ICE BANK - Single Stainless Steel coil
Refrigerant Gas	Natural HYDROCARBON gas R290	
Compressor Power	1/3 HP	1/5 HP
Condensation	Forced ventilation (Fan)	
Adjustable Thermostat	Yes	
Pump	Professional rotary carbonation pump	Professional membrane carbonation pump
Inlet water Pipe	ø 8mm	
Dispensing area height He (mm)	297	
Typology	floor standing	
Supply	230 V - 50 Hz	
Power	920 W - 4 A	300 W - 1.3 A
Working Room Temperature	Min 5°C - Max 35°C	
NET WEIGHT Kg	49	42
GROSS WEIGHT Kg	55	48
Dimensions L x W x H (mm)	479 x 428 x 1440	
Packaging dimensions (mm)	520 x 474 x 1562	
Dispensing	Cold water, Cold sparkling water, Room temperature water	
Push buttons	Electronic button commands with continual or intermittent water supply	
Materials	Robust Stainless steel and internal painted galvanized steel parts	
Other features	Safety inlet valve Predisposition for fixing filters and CO ₂ Cylinder (max. diam. 160mm) inside the machine	



*rated at a room temp. of 25°C and inlet water temp. of 20°C

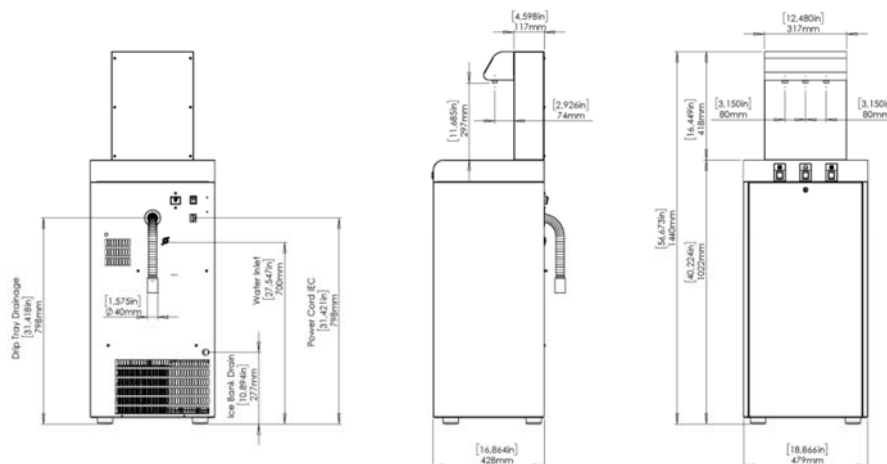

Associations:



Blupura Srl - Italy | T. +39 071 971 0080
info@blupura.com | www.blupura.com

Blupura USA Inc. - USA | T. +1 305 777 3591
blupurausa@blupura.com

Certifications:

